

# Lithium elements

## 2.2 Environmental request

RoHS 2.0

HF 无卤素

REACH

其它


## 2.3 Functional description

- 1) Over-charge voltage protection
- 2) Over-discharge voltage protection
- 3) Over current protection
- 4) Short circuit protection

## 2.4 Mechanical characteristic

- 1) PCM size: L 53.57(±0.2mm)×W 16.07(±0.15mm)×T 4.5mm(MAX)
- 2) PCB MATERIA/PCB: FR-4, 1 oz,1.0±0.10mm
- 3) LAYER: 2Layers
- 4) Plating Method: HASL LF
- 5) PSR INK: GREEN ,
- 6) SILK INK: White

## 2.5 Connecting description

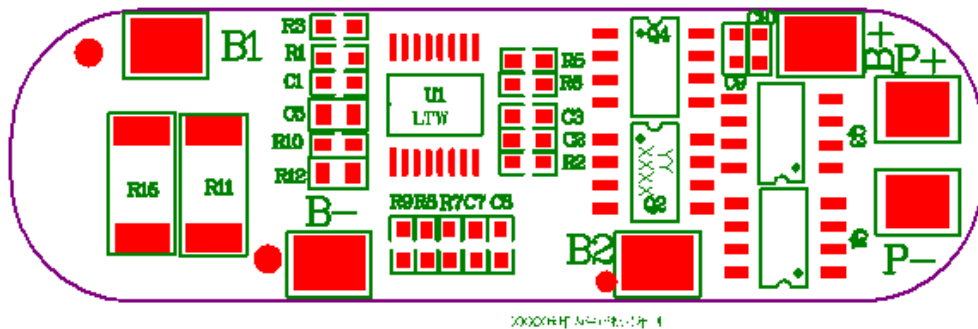

Symbol	Description	Symbol	Description
P+	Battery output/charging positive pole	B+	3Cell positive pole
P-	Battery output/charging negative pole	B2	2Cell positive pole
B1	1Cell positive pole	B-	1Cell negative pole


## 2.6 Electrical characteristic

(Ta=25°C)

Contents 内容	Min.	Type	Max.	Tolerance	Unit
<b>Absolute Maximum Rating</b>					
Input Charging Voltage		10.95			V



Input Charging Current		2	3		A
Output Discharging Voltage	7.5		11.1		V
Continuous Output Discharging Current		2	3		A
<b>Ambient Condition</b>					
Operating Temperature	-40		+85		°C
Humidity (No Water-Drop)	0%		80%		RH
<b>PCM Storage Condition</b>					
PCM Storage Temperature	-55		+125		°C
Humidity (No Water-Drop)	45%		85%		RH
<b>Protection Parameters</b>					
Over-Charge Voltage Protection (OVP)	3600	3650	3700		mV
Over-Charge Voltage Protection Release	3450	3550	3650		mV
Over-Charge Voltage Protection Delay Time	500	1500	2000		mS
Over-Discharge Voltage Protection (UVP)	2400	2500	2600		mV
Over-Discharge Voltage Protection Release	2700	2800	2900		mV
Over-Discharge Voltage Protection Delay Time	50	100	200		mS
Over-Current Charge Protection Detection Voltage	125	150	175		mV
Over-Current Charge Protection (OCC)	7	10	13		A
Over-Current Charge Protection Delay Time	5	10	15		mS
Over-Current Discharge Protection Detection Voltage	125	150	175		mV
Over-Current Discharge Protection (OCD)	7	10	13		A
Over-Current Discharge Protection Delay Time	5	10	15		ms
Short Circuit Protection Detection Voltage (SCP)	400	450	500		mV
Short Circuit Protection Delay Time	100	300	600		uS
Short Circuit Protection Release	Remove Load Or Connect Charger				
<b>Current Consumption</b>					
Normal Mode		20	40		uA
<b>Other Parameters</b>					
Impedance		40	65		mΩ
0V Battery Charge Function 0V	/				
ESD Protection Function ESD	/				

#### 4. Diagram

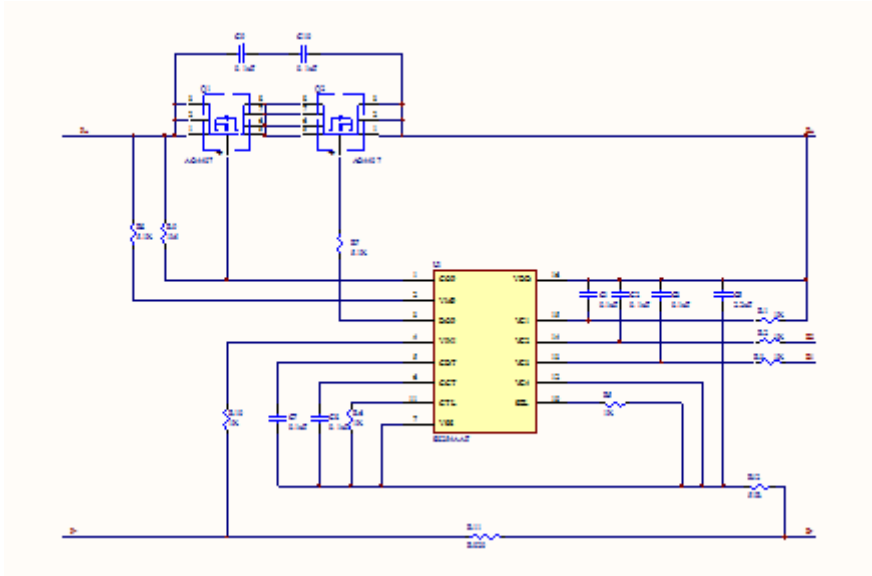


### 5.PCB Layout / PCB

<p>Top layer</p>	<p>The image shows the physical layout of the top layer of the PCB. It features a complex network of red traces and pads, representing the copper layer. The layout is contained within an oval-shaped boundary, indicating the overall shape of the board. The traces are routed around various components, including a central integrated circuit and several peripheral components.</p>
<p>Top overlayer</p>	<p>The image shows the physical layout of the top overlayer of the PCB. It features various component footprints and labels in green and red. The layout is contained within an oval-shaped boundary. Labels include B1, B2, R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16, C1, C2, C3, C4, C5, U1, LTW, P+, P-, and B-. The layout is designed to accommodate the components shown in the schematic diagram.</p>

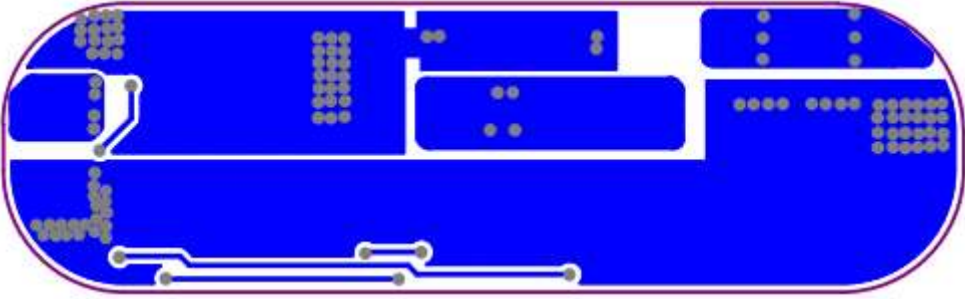Bottom layer	
Bottomoverlayer	

## 7.PCB diagram / PCB

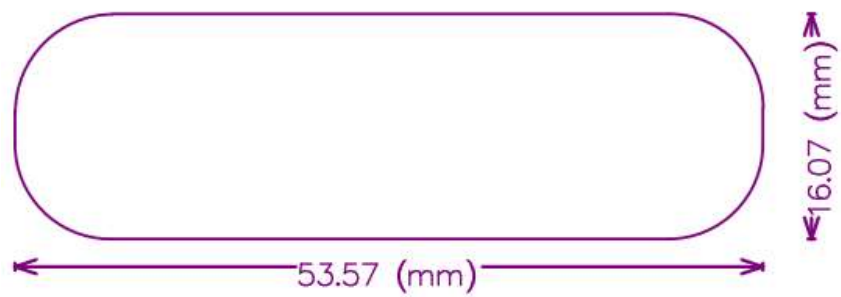

## 9.2 Storage

9.2.1 Storage Temperature:  $23\pm 5^{\circ}\text{C}$

9.2.2 Storage Humidity:  $45\pm 15\%$  RH

9.2.3 Should pay attention to ESD

## 9.3 Transportation

9.3.1 Delivery to your storhouse by express or our deliveryman.

9.3.2 Should pay attention to moisture, moisture, avoid extrusion, impact, etc., to prevent damage to the PCM during transportation.

## 10. Attachment

### 10.1 Sample test data

NO.	Test Project	Test standard	Testing Value					Judgment
			1	2	3	4	5	
1	Overcharge protection voltage	3.65±0.05V	3.660	3.654	3.655	3.662	3.660	OK
2	Over discharge protection voltage	2.5±0.1V	2.513	2.515	2.512	2.513	2.512	OK
3	Discharge over current protection current	7-13A	8.0	7.89	8.02	7.95	7.98	OK
4	Static current	≤40.0 uA	27.5	27.6	27.5	27.6	27.4	OK
5	Impedance (B-&P-)	≤65mΩ	40	38	38	39	41	OK

### 10.2 Environmental Requirements

The specification subjects to the EU Directive about RoHS 2.0, and the hazardous substance conforms to the following standard.

Hazardous substance	Standard (mg/KG)	Remarks
(Cd)	<100	
(Pb)	<1000	
(Hg)	<1000	
(Cr6+)	<1000	
(PBBs)	<1000	
(PBDEs)	<1000	
(DBP)	<1000	
(BBP)	<1000	
(DIBP)	<1000	
(DEHP)	<1000	

Declaration: the above standard is the requirements of EU RoHS 2.0 Directive, we will base on the customer's requirements when it is stricter than the EU standard.